




Windshield Tag

Product Specification

The Favite® Windshield Tag (A804-ONE) is a specific application for UHF RFID Vehicle Management. In addition, access control system with this technique can automatically recognize whether the vehicle allow to enter.

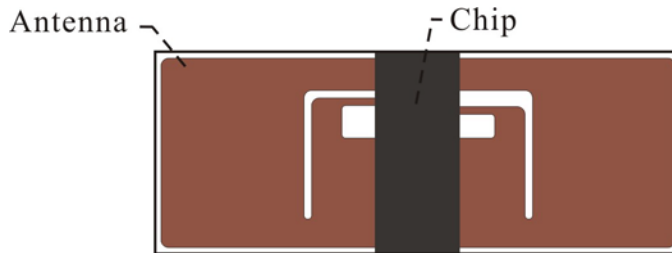

RF Features:

Operating frequency	Global (860-960 MHz)
Mode of operation	Passive (battery free)
Read Range	5~8M (depend on the reader)

Electrical Characteristics:

Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Memory	96 bits EPC number,512 bits User Memory

General Specification:

Antenna	Copper
Substrate	PET
Antenna Size	68mm x 25mm
Wet Inlay Dimension	72mm x 29mm
Operation Temperature	-50°C to +85°C
Storage Temperature	-25°C to +50°C
Humidity	20% to 90%RH Non-condensing
Feature (Optional)	Anti-UV/Anti-copy/Void if Removed

Favite Inc. reserves the right to change its products or services or to discontinue any product or service at any time without prior notice.



Favite Inc. RFID Division Addr: No. 176, Taihe Rd., Jhubei City, Hsinchu County 30267, Taiwan.
Tel: 886-3-5545988 / Fax: 886-3-5545982 / Website: <http://rfid.favite.com> / E-mail: rfid@favite.com